

Classification with Linear Models

Losses for linear classification, logistic regression, multiclass classification

MISiS Mega Science, Spring Semester

Artem Maevskiy¹, Ekaterina Trofimova¹, Andrey Ustyuzhanin^{1,2}

¹National HSE University

²MISiS National University of Science and Technology



LAMBDA • HSE

March 2021



Can't we just use linear regression
for classification?




Classification with linear regression

Classification:

$$\hat{f}(x) = \text{sign}[\theta^T x]$$


- ▶ For binary classification task, assign:
 - $y = +1$ for **positive** class
 - $y = -1$ for **negative** class

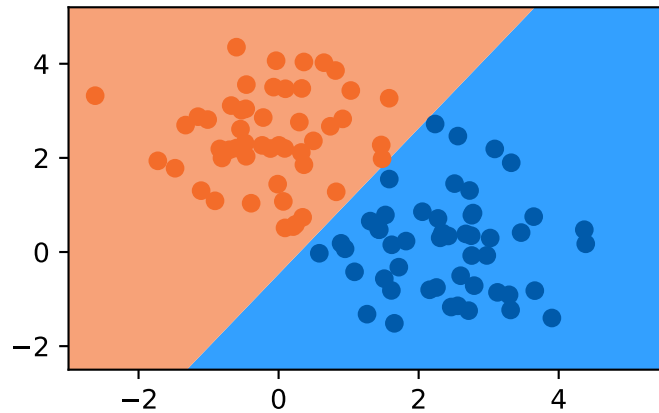

Classification with linear regression

Classification:

$$\hat{f}(x) = \text{sign}[\theta^T x]$$

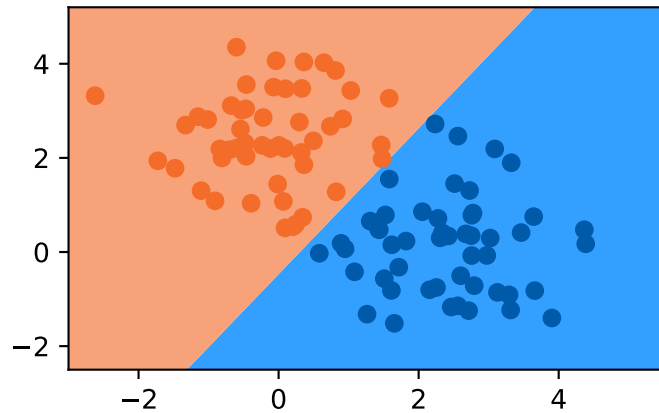


- ▶ For binary classification task, assign:
 - $y = +1$ for **positive** class
 - $y = -1$ for **negative** class
- ▶ Solve linear regression for $\hat{y} = \theta^T x$ with MSE loss

Classification with linear regression

Classification:

$$\hat{f}(x) = \text{sign}[\theta^T x]$$

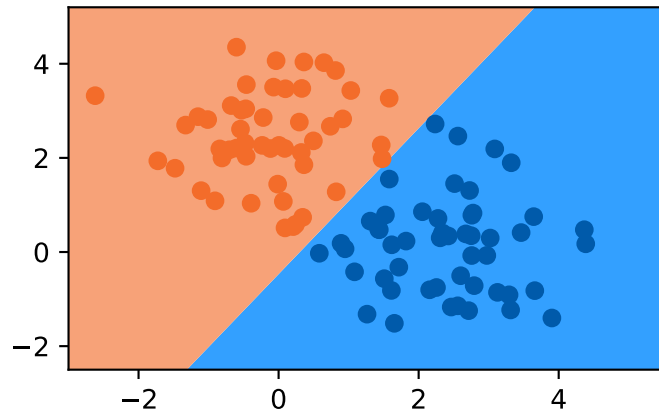


- ▶ For binary classification task, assign:
 - $y = +1$ for **positive** class
 - $y = -1$ for **negative** class
- ▶ Solve linear regression for $\hat{y} = \theta^T x$ with MSE loss
- ▶ Classify with $\text{sign}[\hat{y}]$

Classification with linear regression


Classification:

$$\hat{f}(x) = \text{sign}[\theta^T x]$$

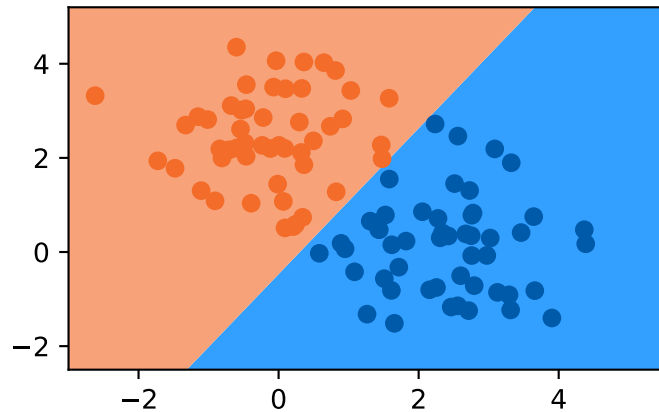


- ▶ For binary classification task, assign:
 - $y = +1$ for **positive** class
 - $y = -1$ for **negative** class
- ▶ Solve linear regression for $\hat{y} = \theta^T x$ with MSE loss
- ▶ Classify with $\text{sign}[\hat{y}]$
- ▶ Any problems with this approach?

Classification with linear regression

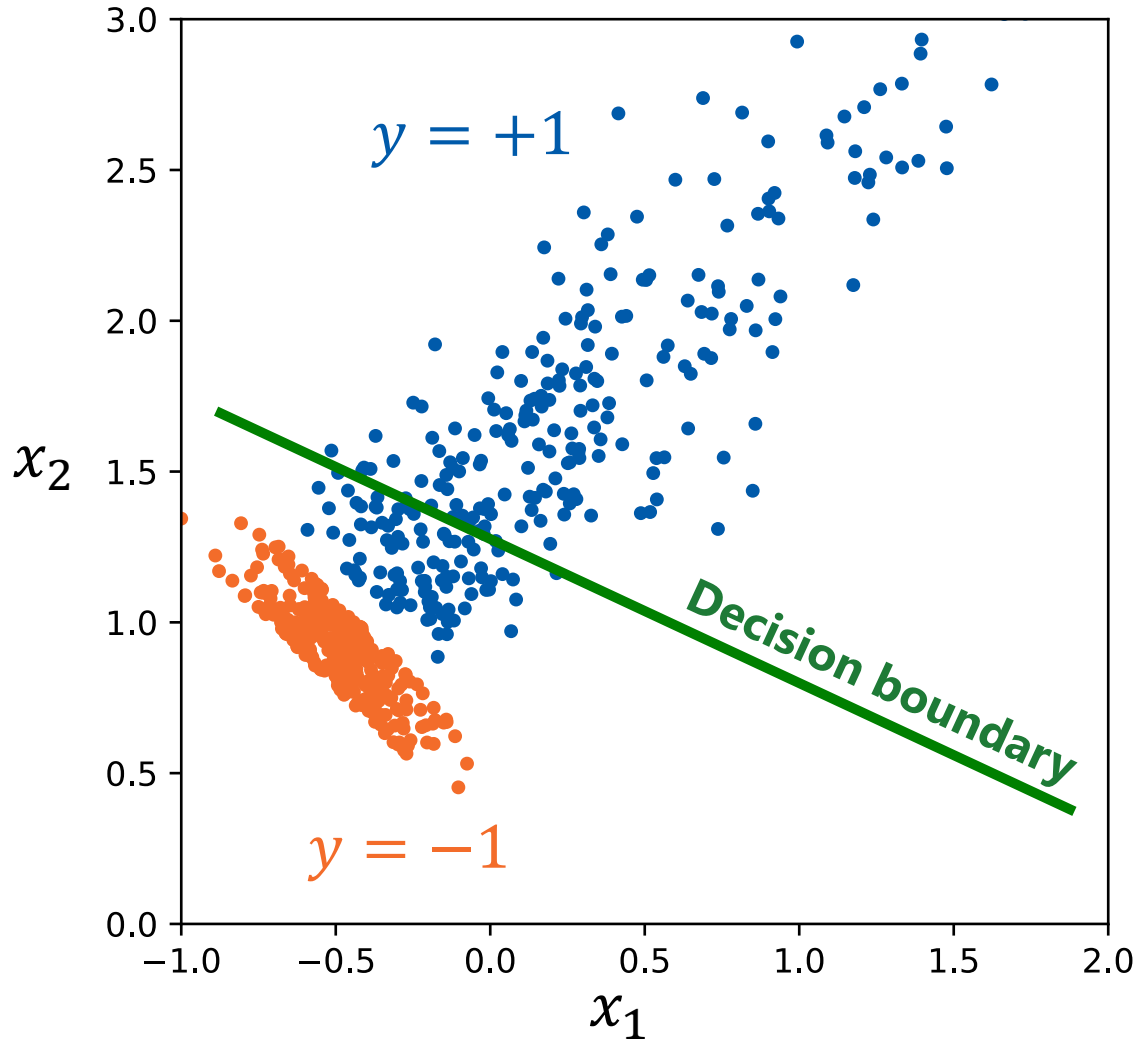

- ▶ May face problems when classes are unbalanced or have different spread

Classification with linear regression

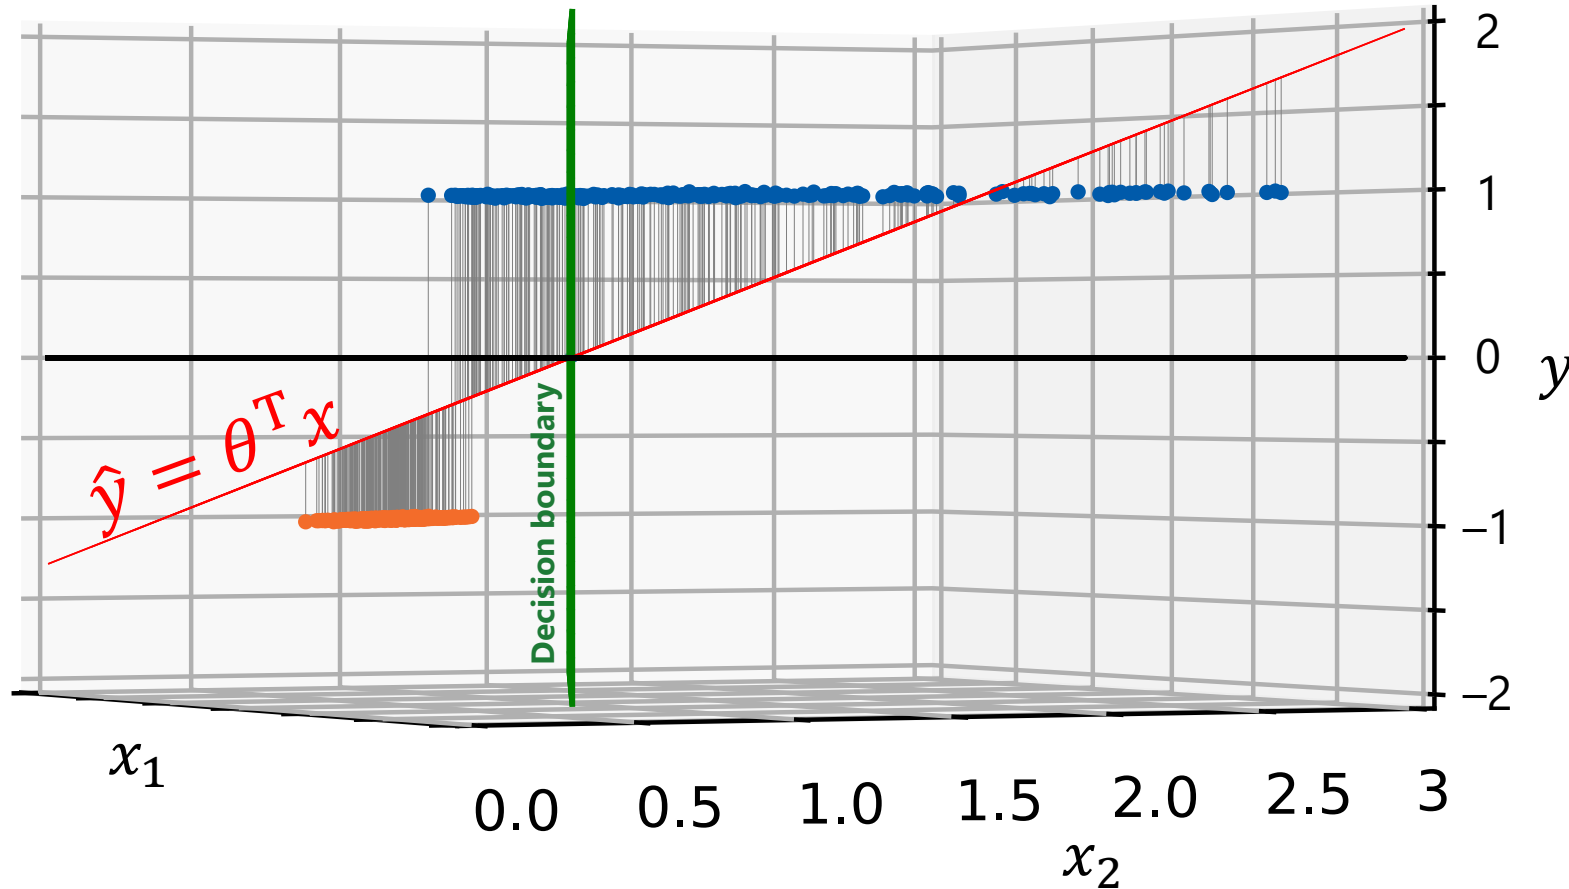

MSE loss makes the model **avoid high residuals**

at a price of **pushing the decision boundary** towards the class with higher spread

Can we find a better loss function?

Classification loss functions




0-1 Loss

- ▶ Probability of an error

$$\mathcal{L}_{0-1} = \frac{1}{N} \sum_{i=1 \dots N} \mathbb{I}(\theta^T x_i \cdot y_i < 0)$$

$$y_i \in \{-1, +1\}$$

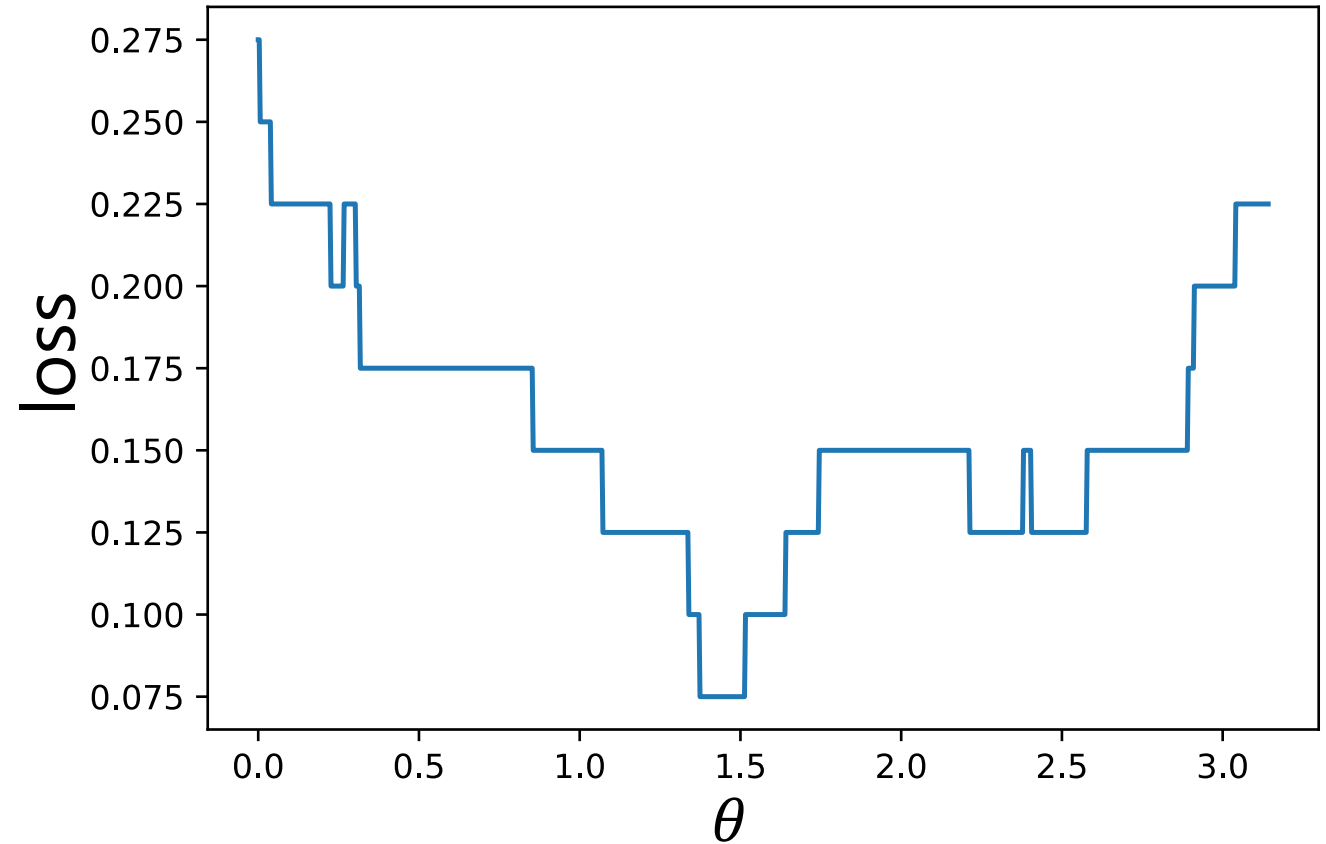


0-1 Loss

- ▶ Probability of an error

$$\mathcal{L}_{0-1} = \frac{1}{N} \sum_{i=1 \dots N} \mathbb{I}(\theta^T x_i \cdot y_i < 0)$$

$$y_i \in \{-1, +1\}$$

- ▶ Can't optimize **piecewise constant** function with gradient-based methods*

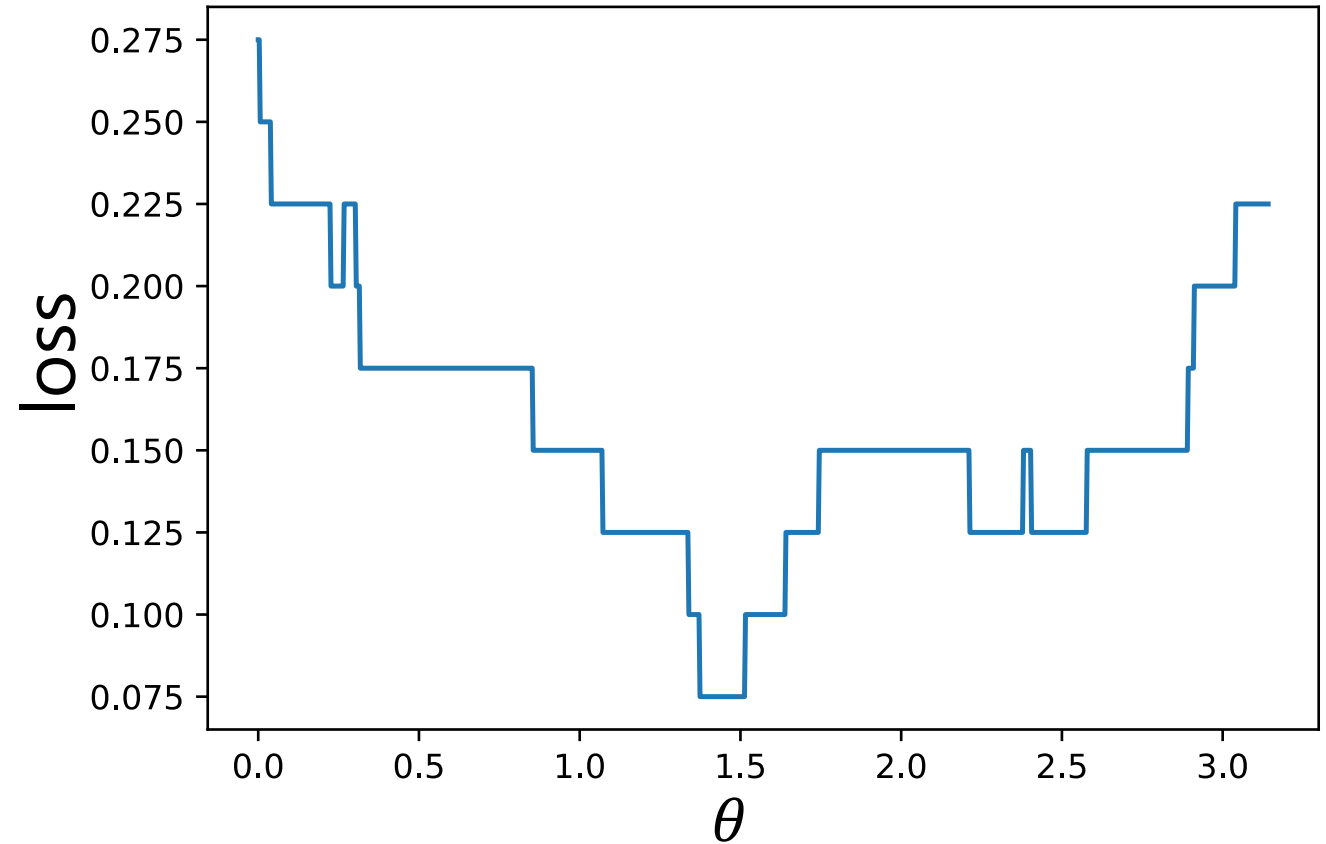

*other techniques exist (still quite limited), will be discussed in few days

Margin

$$M = \theta^T x \cdot y$$


$$\mathcal{L}_{0-1} = \frac{1}{N} \sum_{i=1 \dots N} \mathbb{I}(\theta^T x_i \cdot y_i < 0)$$

margin

$M > 0$ – correct classification

$M < 0$ – incorrect classification

Upper bounds on 0-1 loss

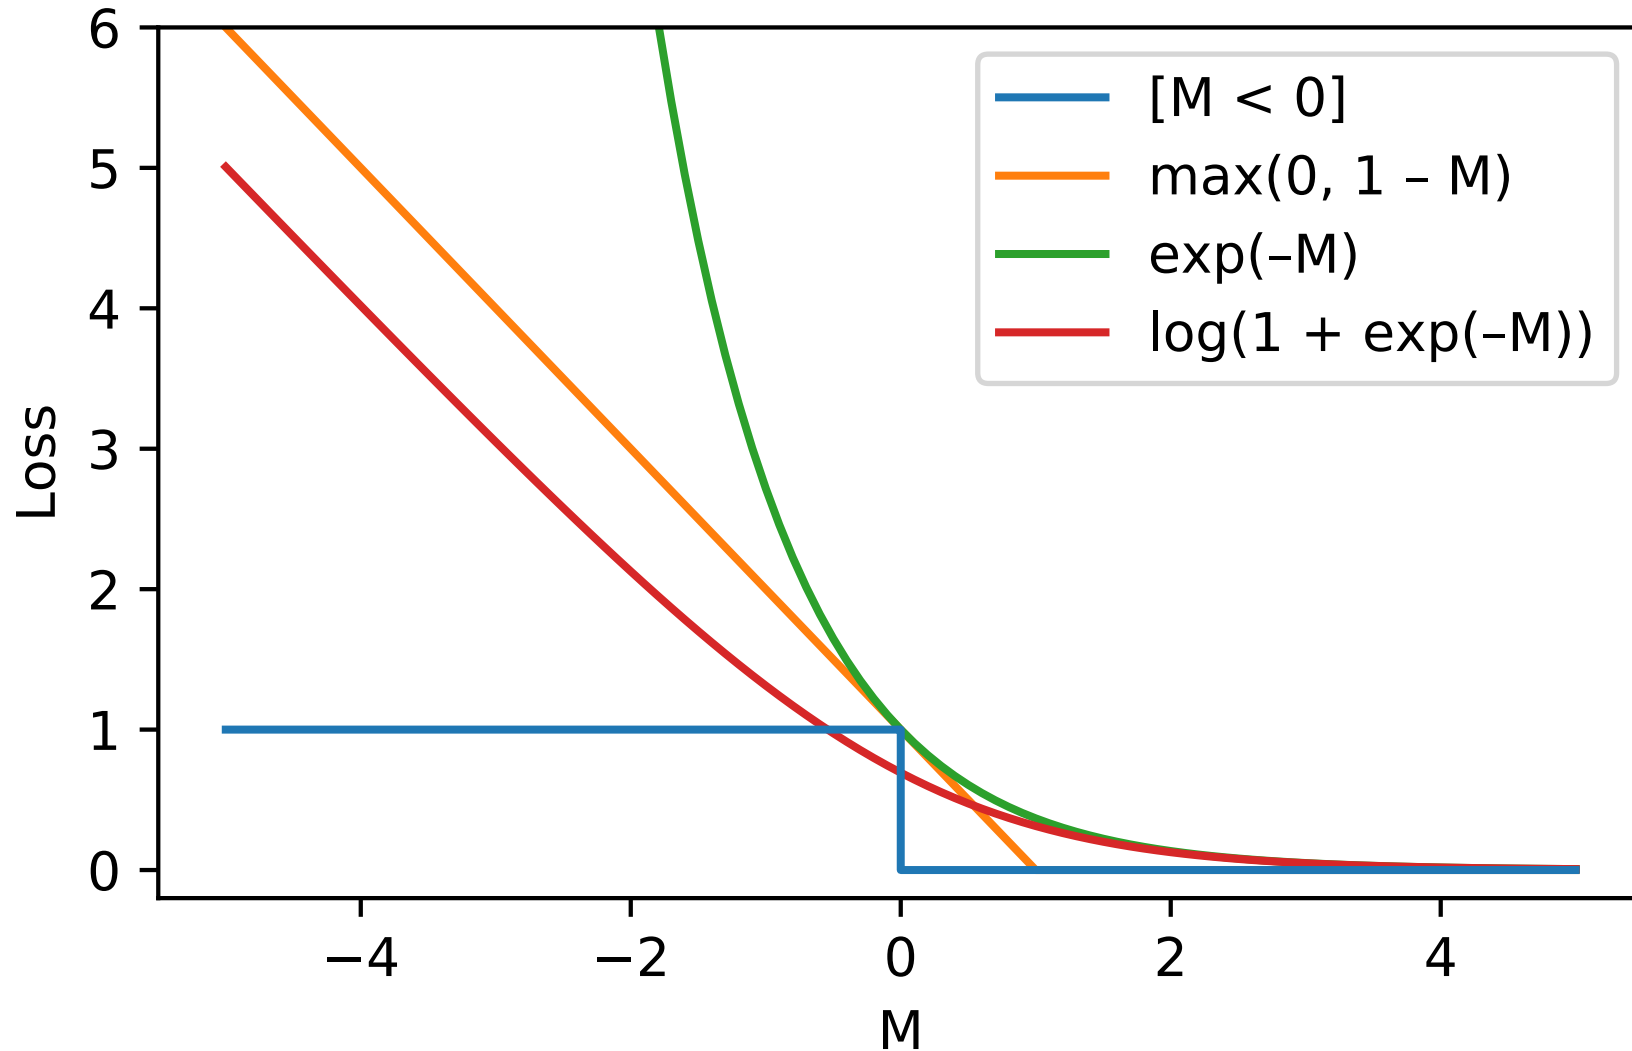

Instead of optimizing the 0-1 loss we can optimize a **differentiable upper bound**

Logistic Regression



Idea

- ▶ Let's model the **class probabilities**

$$P(y = +1|x) = \hat{f}_\theta(x)$$

$$P(y = -1|x) = 1 - \hat{f}_\theta(x)$$

Idea

- ▶ Let's model the **class probabilities**

$$P(y = +1|x) = \hat{f}_\theta(x)$$

$$P(y = -1|x) = 1 - \hat{f}_\theta(x)$$

- ▶ Fit with **maximum (log) likelihood**

Idea

- ▶ Let's model the **class probabilities**

$$\text{Likelihood} = \prod_{i=1 \dots N} P(y_i | x_i)$$

$$P(y = +1 | x) = \hat{f}_\theta(x)$$
$$P(y = -1 | x) = 1 - \hat{f}_\theta(x)$$

- ▶ Fit with **maximum (log) likelihood**

Idea

- ▶ Let's model the **class probabilities**

$$P(y = +1|x) = \hat{f}_\theta(x)$$

$$P(y = -1|x) = 1 - \hat{f}_\theta(x)$$

$$\begin{aligned} \text{Likelihood} &= \prod_{i=1 \dots N} P(y_i|x_i) \\ &= \prod_{i=1 \dots N} [\mathbb{I}[y_i = +1] \cdot \hat{f}_\theta(x_i) \\ &\quad + \mathbb{I}[y_i = -1] \cdot (1 - \hat{f}_\theta(x_i))] \end{aligned}$$

- ▶ Fit with **maximum (log) likelihood**

Idea

- ▶ Let's model the **class probabilities**

$$P(y = +1|x) = \hat{f}_\theta(x)$$

$$P(y = -1|x) = 1 - \hat{f}_\theta(x)$$

$$\begin{aligned} \text{Likelihood} &= \prod_{i=1 \dots N} P(y_i|x_i) \\ &= \prod_{i=1 \dots N} [\mathbb{I}[y_i = +1] \cdot \hat{f}_\theta(x_i) \\ &\quad + \mathbb{I}[y_i = -1] \cdot (1 - \hat{f}_\theta(x_i))] \end{aligned}$$

- ▶ Fit with **maximum (log) likelihood**

$$\theta = \operatorname{argmax}_{\theta} \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_\theta(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_\theta(x_i)) \right]$$

Idea

- ▶ Let's model the **class probabilities**

$$P(y = +1|x) = \hat{f}_\theta(x)$$

$$P(y = -1|x) = 1 - \hat{f}_\theta(x)$$

$$\begin{aligned} \text{Likelihood} &= \prod_{i=1 \dots N} P(y_i|x_i) \\ &= \prod_{i=1 \dots N} [\mathbb{I}[y_i = +1] \cdot \hat{f}_\theta(x_i) \\ &\quad + \mathbb{I}[y_i = -1] \cdot (1 - \hat{f}_\theta(x_i))] \end{aligned}$$

- ▶ Fit with **maximum (log) likelihood**

$$\theta = \operatorname{argmax}_\theta \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_\theta(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_\theta(x_i)) \right]$$

- ▶ Predict the class with **highest probability***

*more generally: find a probability threshold suitable for your problem


Linear probability model

- ▶ How to map the linear model output to a probability value in $[0, 1]$?

Linear probability model

- ▶ How to map the linear model output to a probability value in $[0, 1]$?
- ▶ Common choice – **sigmoid function**:

$$\sigma(\chi) = \frac{1}{1 + e^{-\chi}}$$

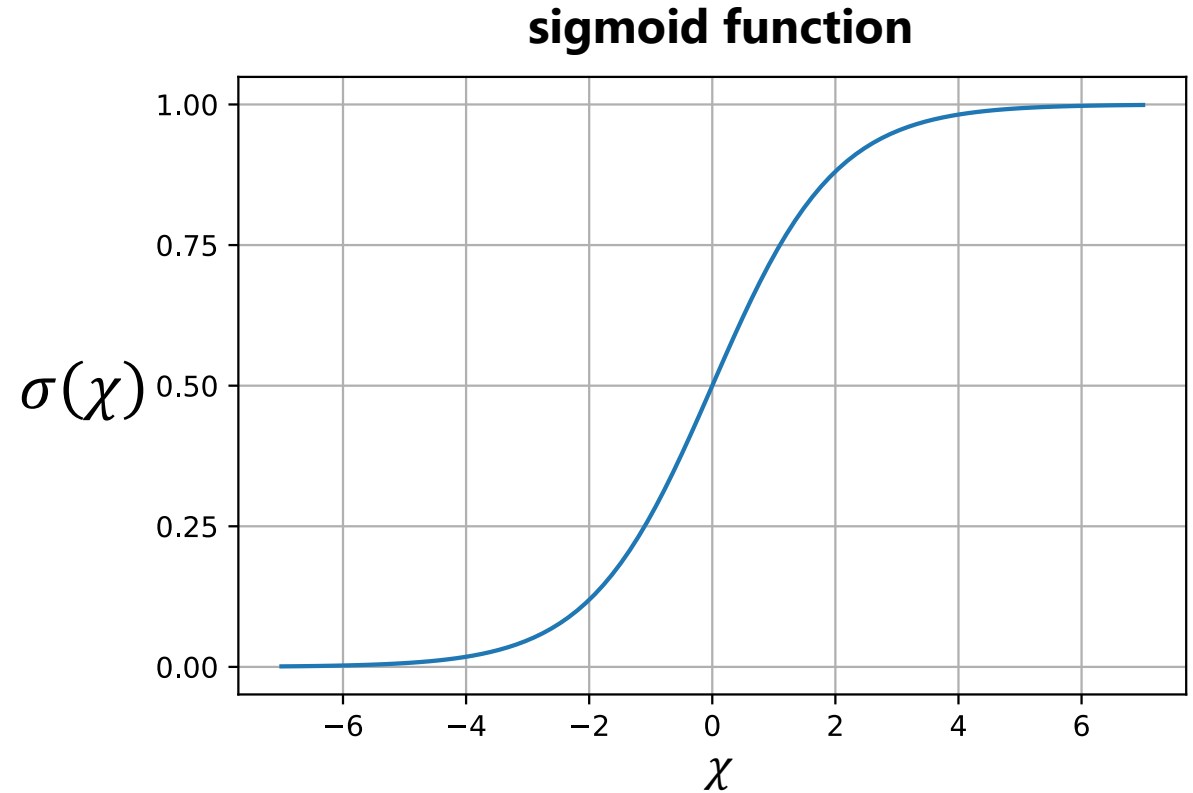


Linear probability model

- ▶ How to map the linear model output to a probability value in $[0, 1]$?

- ▶ Common choice – **sigmoid function**:

$$\sigma(\chi) = \frac{1}{1 + e^{-\chi}}$$

- ▶ I.e. $P(y = +1|x) = \sigma(\theta^T x)$

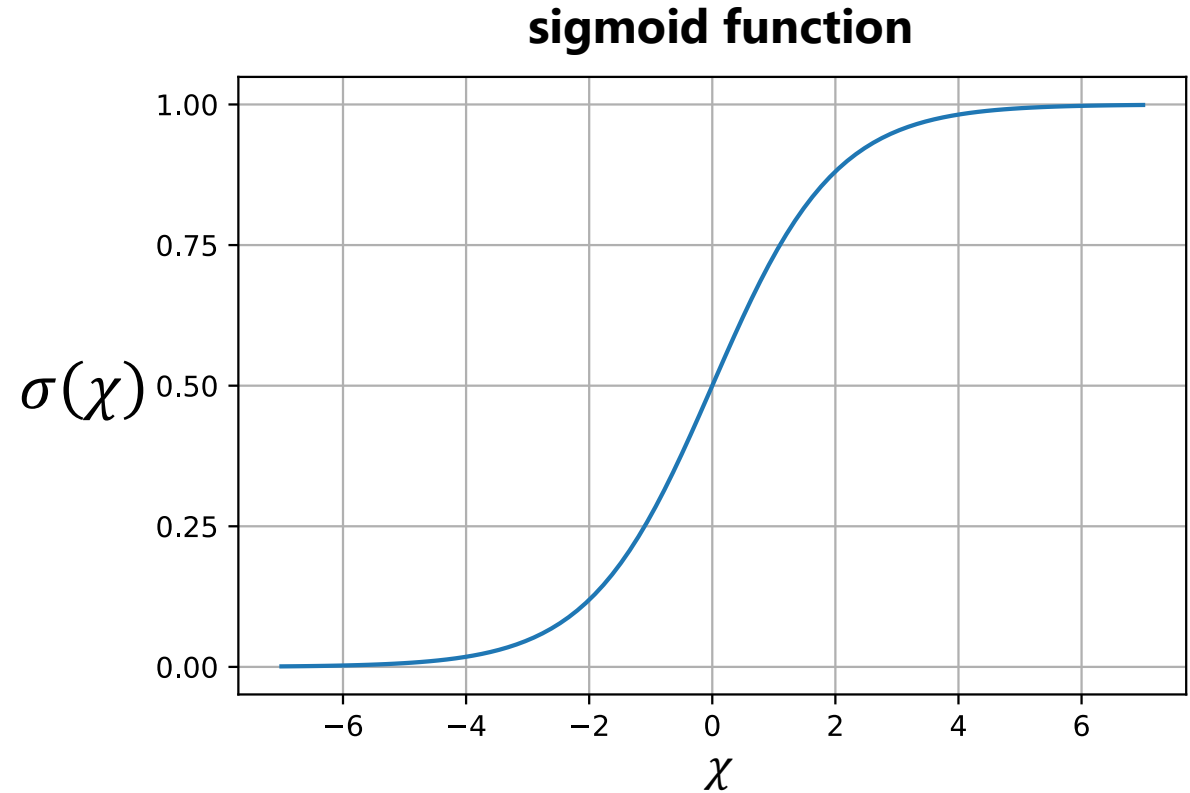

Linear probability model

- ▶ How to map the linear model output to a probability value in $[0, 1]$?

- ▶ Common choice – **sigmoid function**:


$$\sigma(\chi) = \frac{1}{1 + e^{-\chi}}$$

- ▶ I.e. $P(y = +1|x) = \sigma(\theta^T x)$

- ▶ Then, $\theta^T x$ has the meaning of **log odds ratio** between the two classes:

$$\log \frac{P(y = +1|x)}{P(y = -1|x)} = \log \left(\frac{1}{1 + e^{-\theta^T x}} \cdot \frac{1 + e^{-\theta^T x}}{e^{-\theta^T x}} \right) = \theta^T x$$

sigmoid function

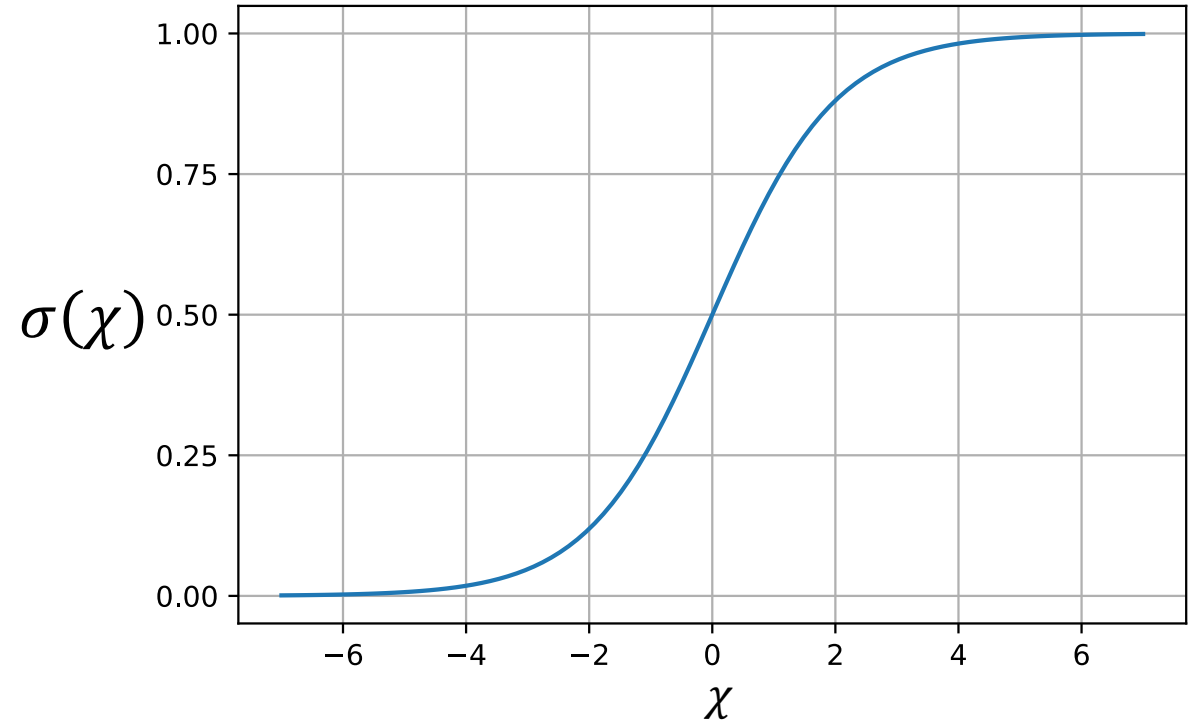

Bringing it all together

- ▶ Use negative log likelihood as our loss function:

$$\mathcal{L} = - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_\theta(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_\theta(x_i)) \right]$$

Bringing it all together

- ▶ Use negative log likelihood as our loss function:

$$\mathcal{L} = - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_{\theta}(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_{\theta}(x_i)) \right]$$

$$1 - \sigma(x) = \sigma(-x)$$


$$= - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \sigma(\theta^T x_i) + \mathbb{I}[y_i = -1] \cdot \log \sigma(-\theta^T x_i) \right]$$

Bringing it all together

- ▶ Use negative log likelihood as our loss function:

$$\mathcal{L} = - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_{\theta}(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_{\theta}(x_i)) \right]$$

$$1 - \sigma(x) = \sigma(-x)$$


$$= - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \sigma(\theta^T x_i) + \mathbb{I}[y_i = -1] \cdot \log \sigma(-\theta^T x_i) \right]$$

$$= - \sum_{i=1 \dots N} \log \sigma(\theta^T x_i \cdot y_i)$$

Bringing it all together

- ▶ Use negative log likelihood as our loss function:

$$\mathcal{L} = - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_\theta(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_\theta(x_i)) \right]$$

$$1 - \sigma(x) = \sigma(-x)$$


$$= - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \sigma(\theta^T x_i) + \mathbb{I}[y_i = -1] \cdot \log \sigma(-\theta^T x_i) \right]$$

$$= - \sum_{i=1 \dots N} \log \sigma(\theta^T x_i \cdot y_i) = \sum_{i=1 \dots N} \log (1 + e^{-\theta^T x_i \cdot y_i})$$

Bringing it all together

- ▶ Use negative log likelihood as our loss function:

$$\mathcal{L} = - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \hat{f}_\theta(x_i) + \mathbb{I}[y_i = -1] \cdot \log (1 - \hat{f}_\theta(x_i)) \right]$$


$$1 - \sigma(x) = \sigma(-x)$$


$$= - \sum_{i=1 \dots N} \left[\mathbb{I}[y_i = +1] \cdot \log \sigma(\theta^T x_i) + \mathbb{I}[y_i = -1] \cdot \log \sigma(-\theta^T x_i) \right]$$

$$= - \sum_{i=1 \dots N} \log \sigma(\theta^T x_i \cdot y_i) = \sum_{i=1 \dots N} \log (1 + e^{-\theta^T x_i \cdot y_i})$$


- ▶ This can be optimized **numerically**

Example

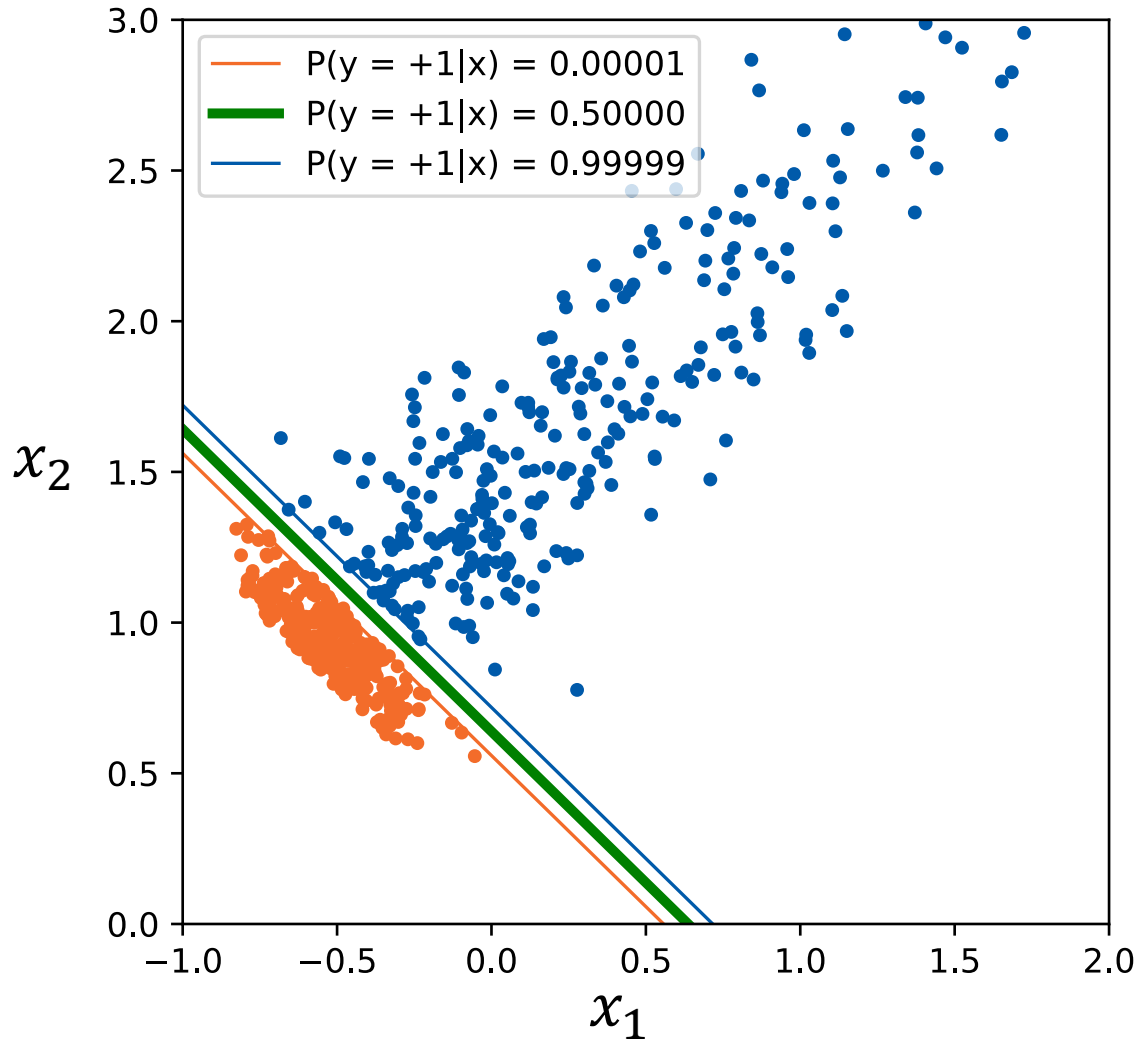


► Now the boundary is at the right place

Example

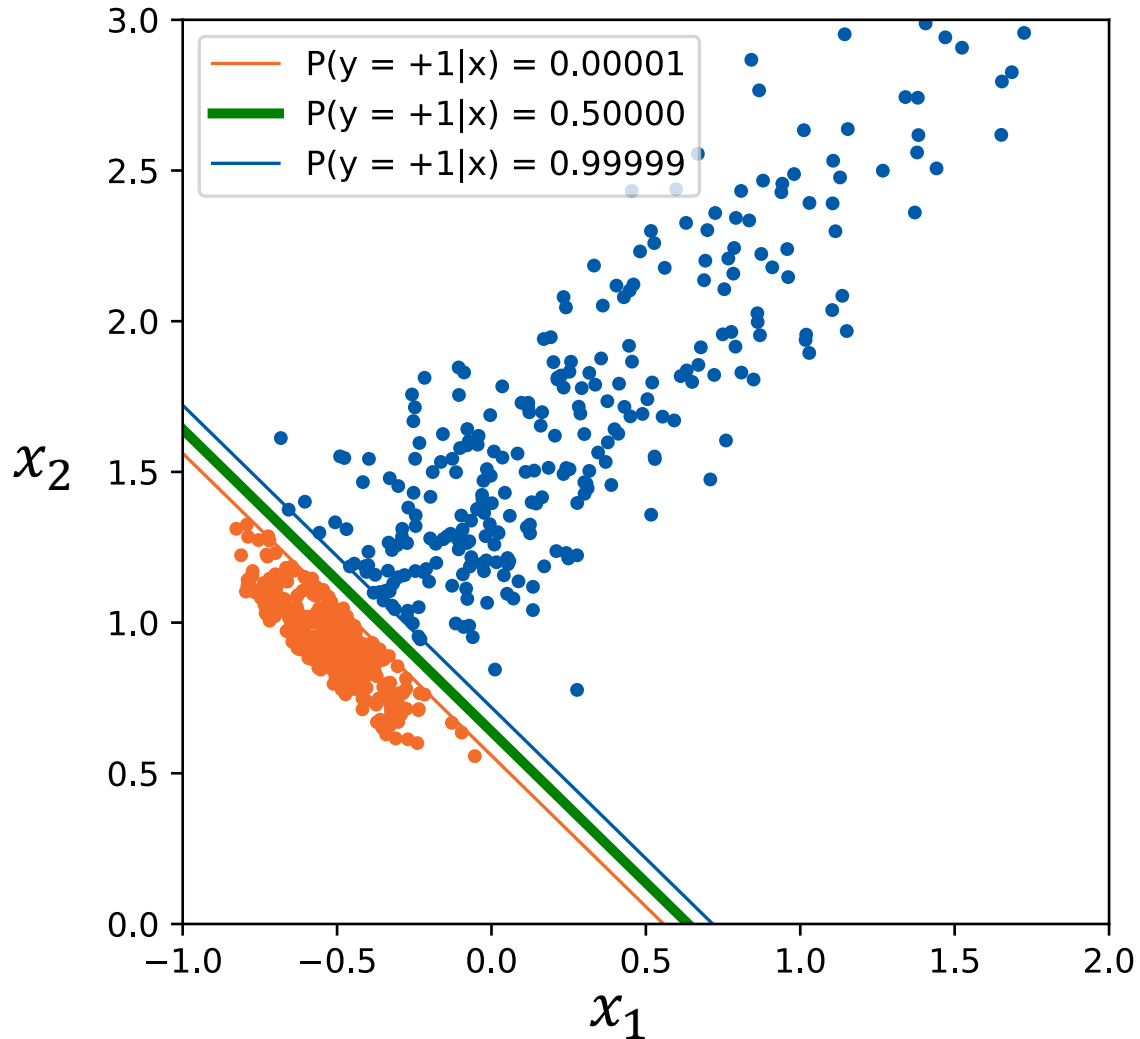


- ▶ Now the boundary is at the right place
- ▶ Note: when classes are linearly separable for any correct decision boundary
 $\theta \rightarrow C \cdot \theta$, for some $C > 1 \in \mathbb{R}$
keeps the boundary at the same place, yet improves the loss

Example

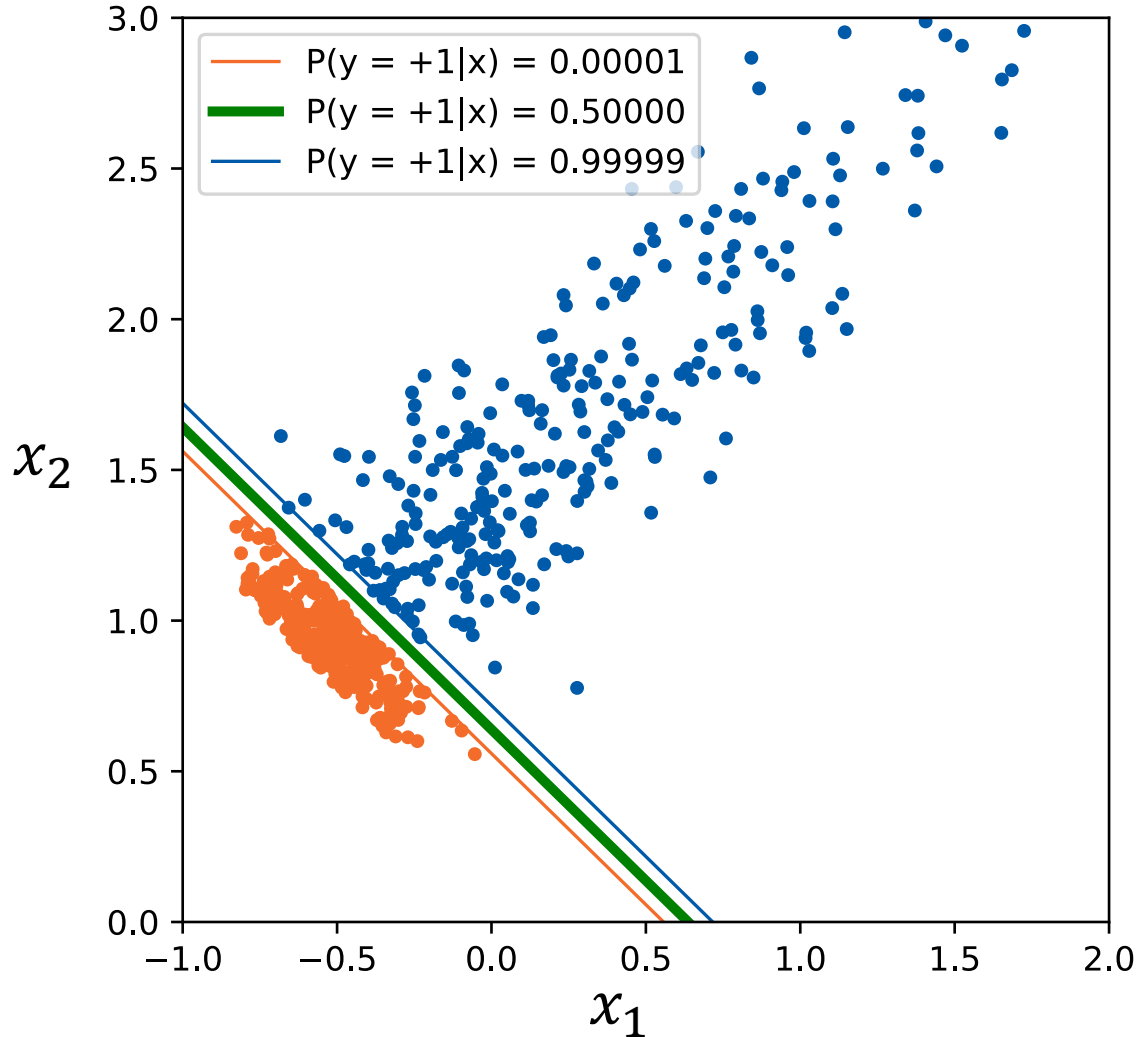

- ▶ Now the boundary is at the right place
- ▶ Note: when classes are linearly separable for any correct decision boundary
 $\theta \rightarrow C \cdot \theta$, for some $C > 1 \in \mathbb{R}$
keeps the boundary at the same place, yet improves the loss
- ▶ ideal fit when sigmoid turns into a step function (at infinitely large θ)

Example

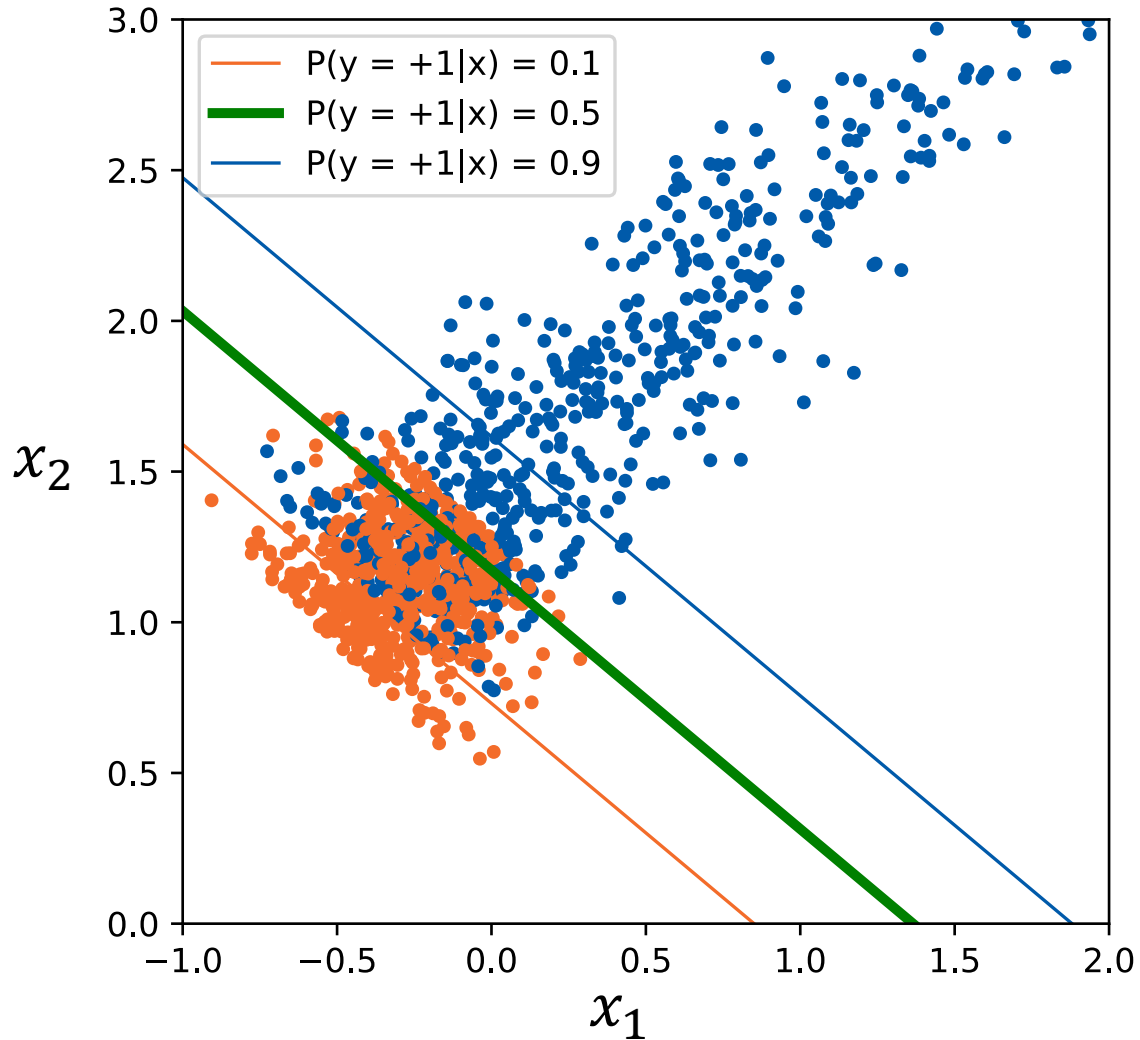


- ▶ When classes overlap the loss has a finite minimum
- ▶ Predicted class probability changes smoothly

Binary → multiclass

- ▶ Any binary linear classification model can be converted to multiclass with **one-vs-rest** strategy
- ▶ For each class k train a binary model $\hat{f}_k(x) = \theta_{(k)}^T x$ separating the given class from all others, $\hat{y}_{(k)}^{1\text{-vs-rest}} = \text{sign}[\hat{f}_k(x)]$
- ▶ Use the outputs of \hat{f}_k as class scores for multiclass classification:


$$\hat{y}_i = \underset{k}{\operatorname{argmax}} \hat{f}_k(x_i)$$

Example

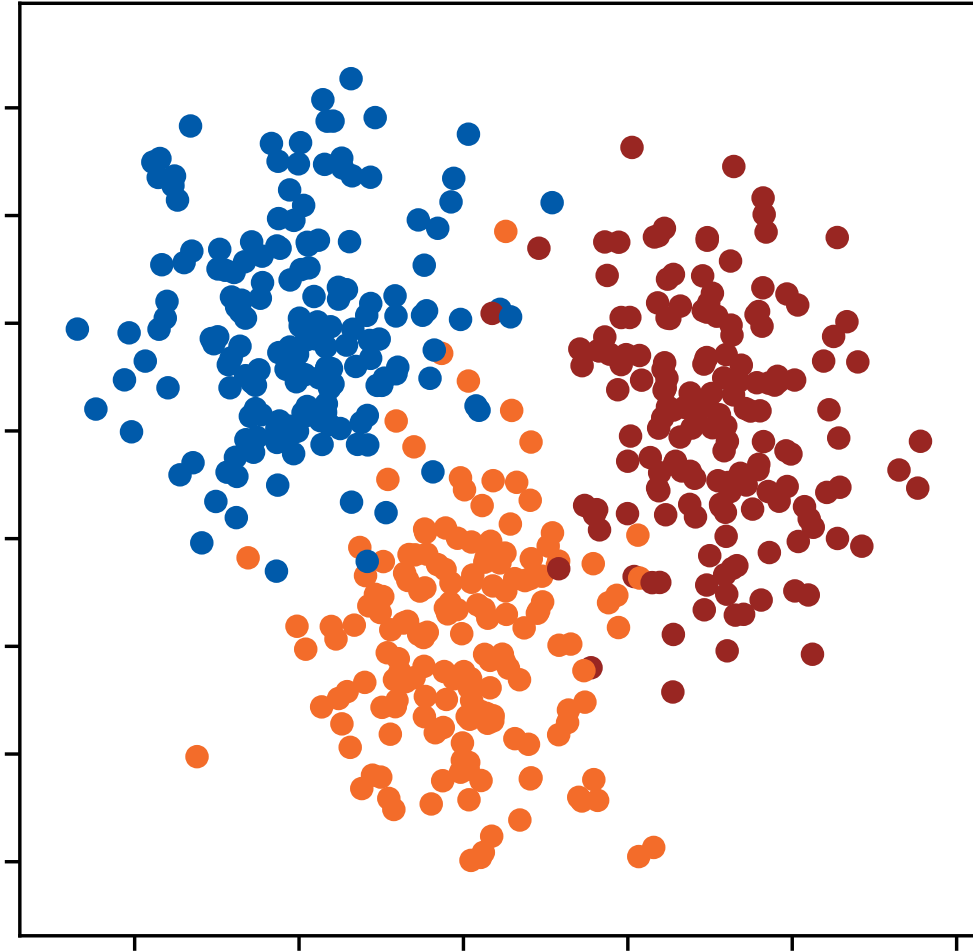


- ▶ Consider the following 3 class problem

Example

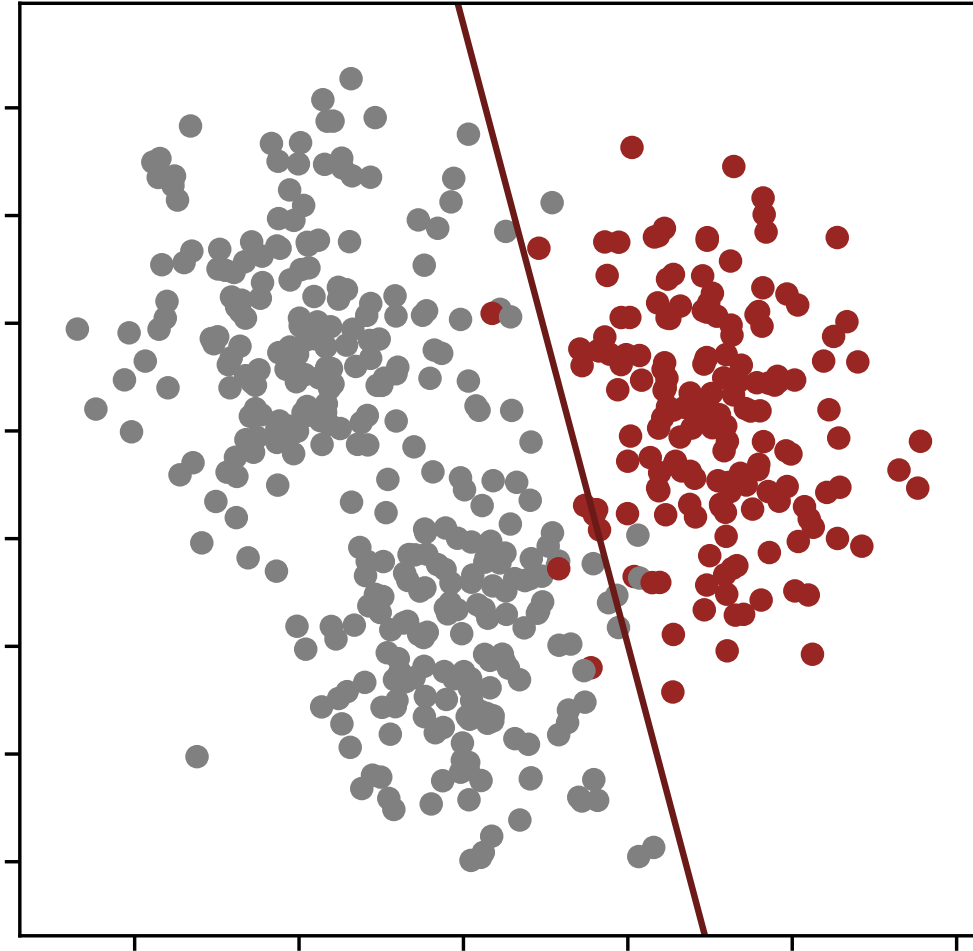


- ▶ “Class-1 VS rest” binary classifier

Example

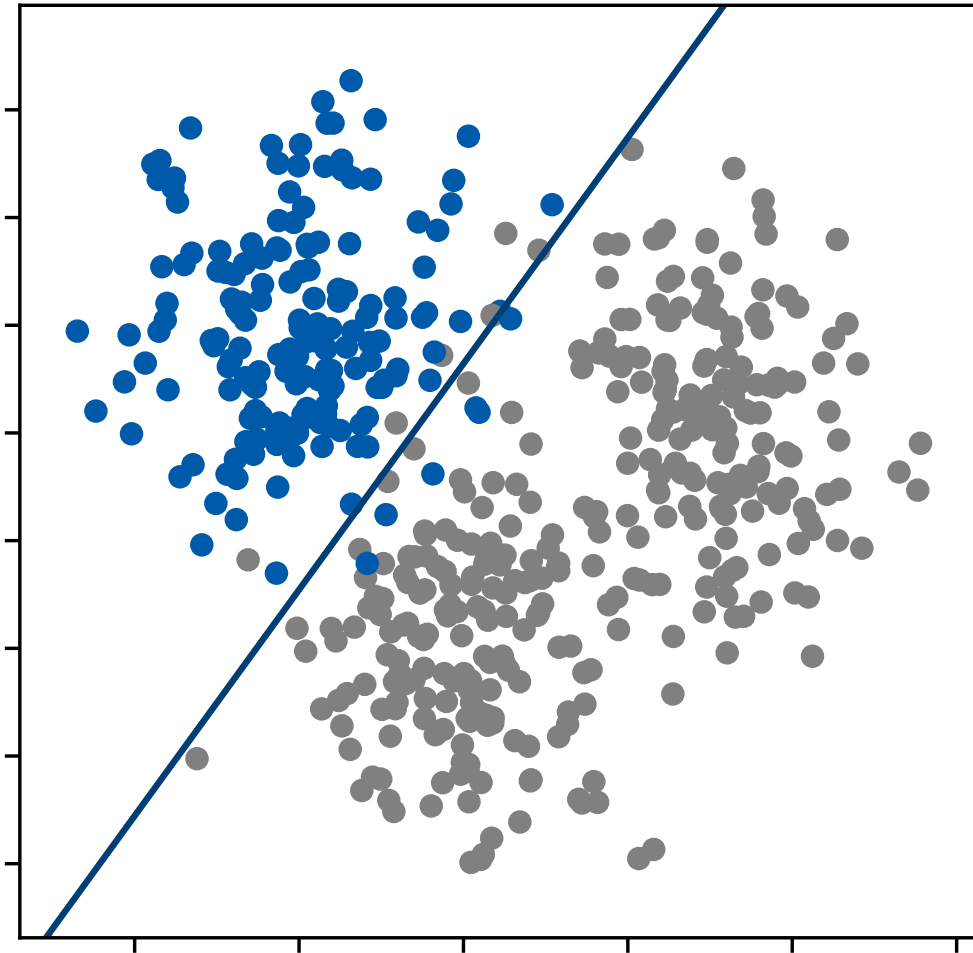


- ▶ “Class-2 VS rest” binary classifier

Example

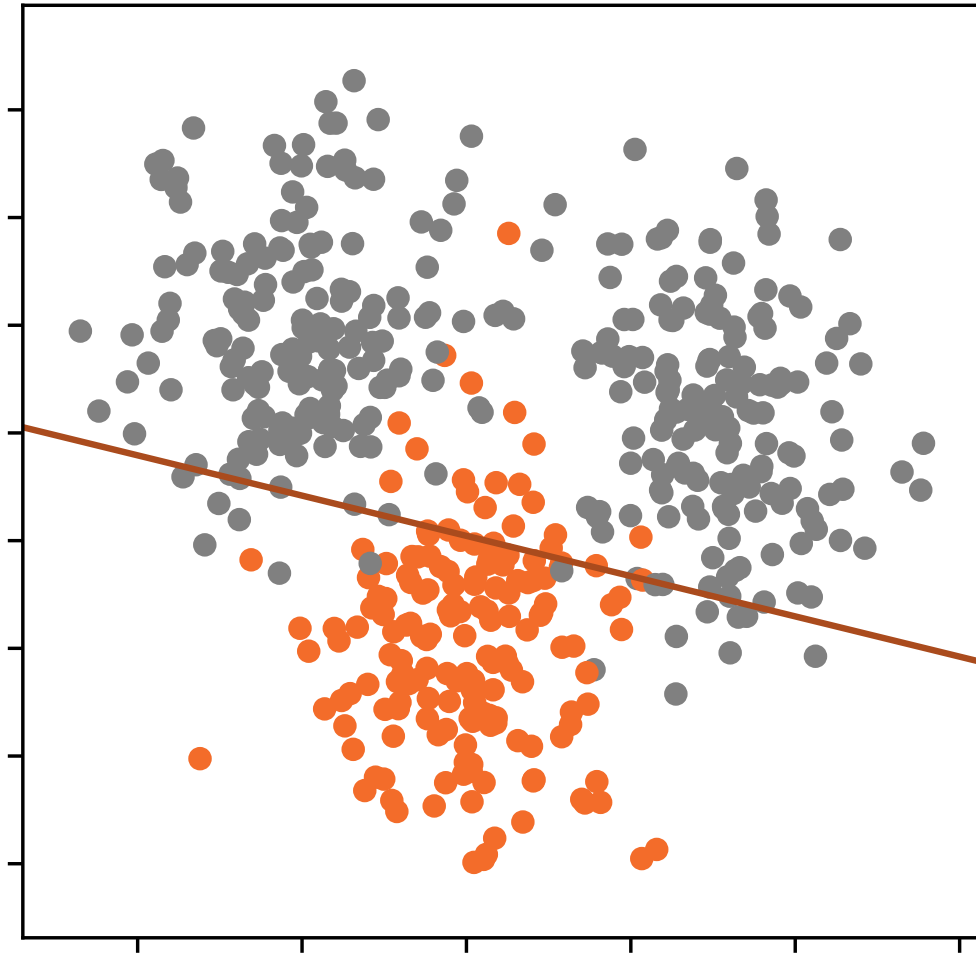


- ▶ “Class-3 VS rest” binary classifier

Example

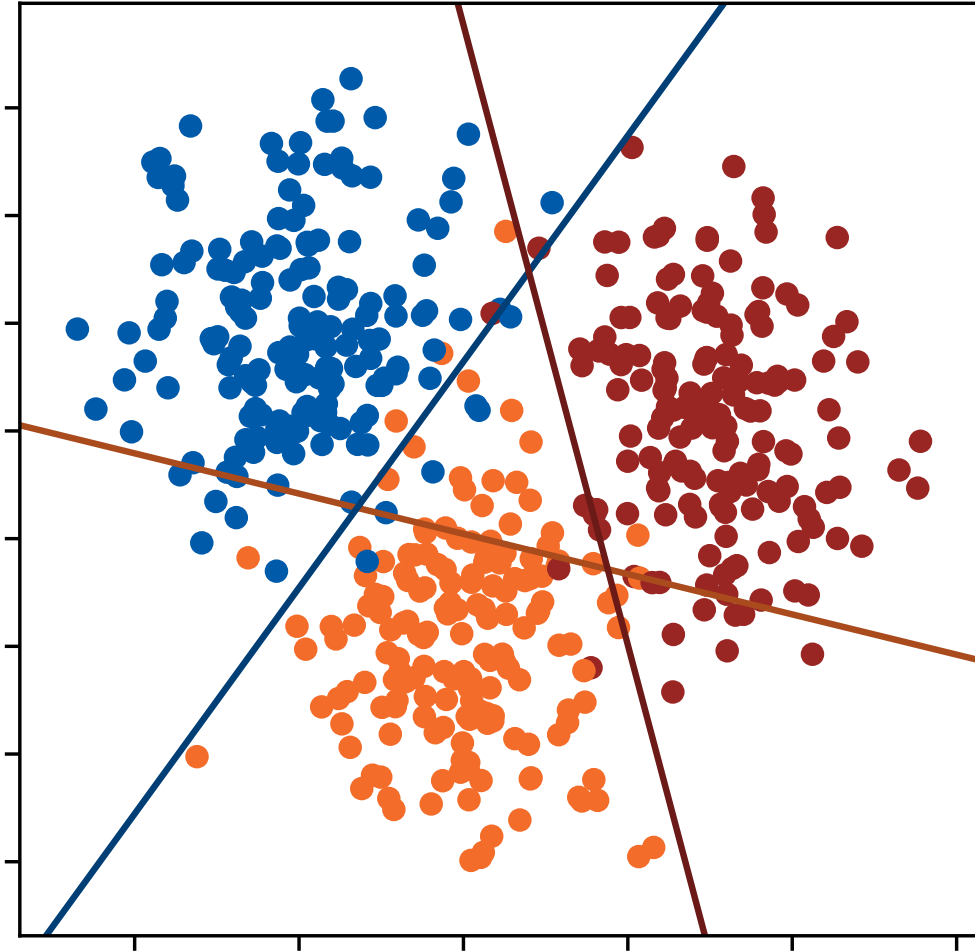


- ▶ $\hat{f}_k(x) = 0$ lines (binary decision boundaries)

Example

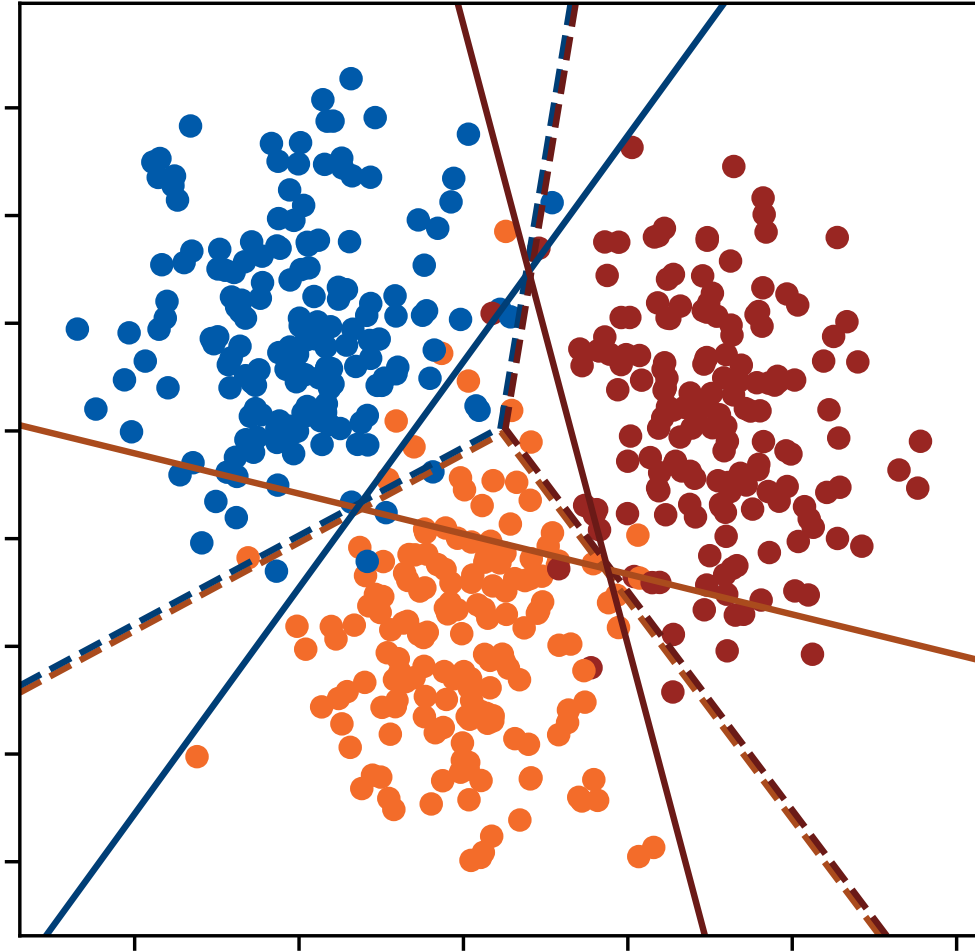

- ▶ $\hat{f}_k(x) = 0$ lines (binary decision boundaries)
- ▶ Adding decision boundaries for $\hat{y} = \operatorname{argmax}_k \hat{f}_k(x)$

Example

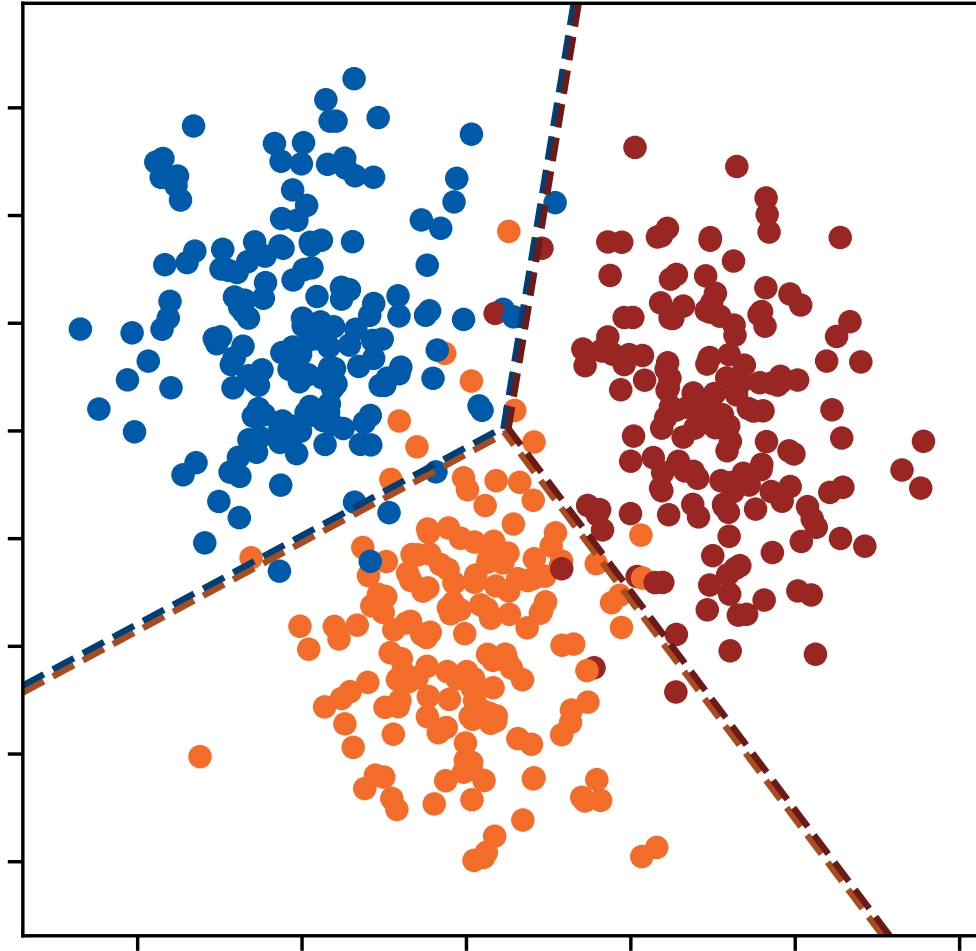

- ▶ Adding decision boundaries for

$$\hat{y} = \operatorname{argmax}_k \hat{f}_k(x)$$

Summary

- ▶ Classification with linear regression and MSE loss may provide **biased results**
- ▶ 0-1 loss function is better, but is **hard to optimize** directly
- ▶ Various **differentiable upper bounds** on 0-1 loss may be used instead
- ▶ Logistic Regression combines such an upper bound with a **probabilistic model** using the **sigmoid function**
- ▶ Any binary linear classifier can be adapted to multiclass with the **one-vs-rest strategy**

Quiz / Questions

For the case of classifying d -dimensional data into K classes using logistic regression (with a bias term), how many scalar parameters do we fit?



A. $(d + 1) \cdot K$

B. $(d + 1) \cdot (K - 1)$

C. $d \cdot K$

D. $d \cdot (K - 1)$

Image by: pixabay.com/users/alexas_fotos-686414/